

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 246 131 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
02.10.2002 Bulletin 2002/40

(51) Int Cl.7: G06T 9/00

(21) Application number: 02006295.6

(22) Date of filing: 20.03.2002

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Sun, Shijun  
Vancouver, WA 98683 (US)  
• Lei, Shawmin  
Camas, WA 98607 (US)

(30) Priority: 26.03.2001 US 817701

(74) Representative: Müller - Hoffmann & Partner  
Patentanwälte,  
Innere Wiener Strasse 17  
81667 München (DE)


(71) Applicant: Sharp Kabushiki Kaisha  
Osaka (JP)

(54) Method and apparatus for the reduction of artifact in decompressed images using post-filtering

(57) Adjacent blocks (44, 46) are identified in an image. Coding parameters for the adjacent blocks (44, 46) are identified (102). Deblock filtering (104) between the identified adjacent blocks (44, 46) is skipped if the cod-

ing parameters (55) for the identified adjacent blocks (44, 46) are similar and not skipped if the coding parameters (55) for the identified adjacent blocks (44, 46) are substantially different.

FIG.8

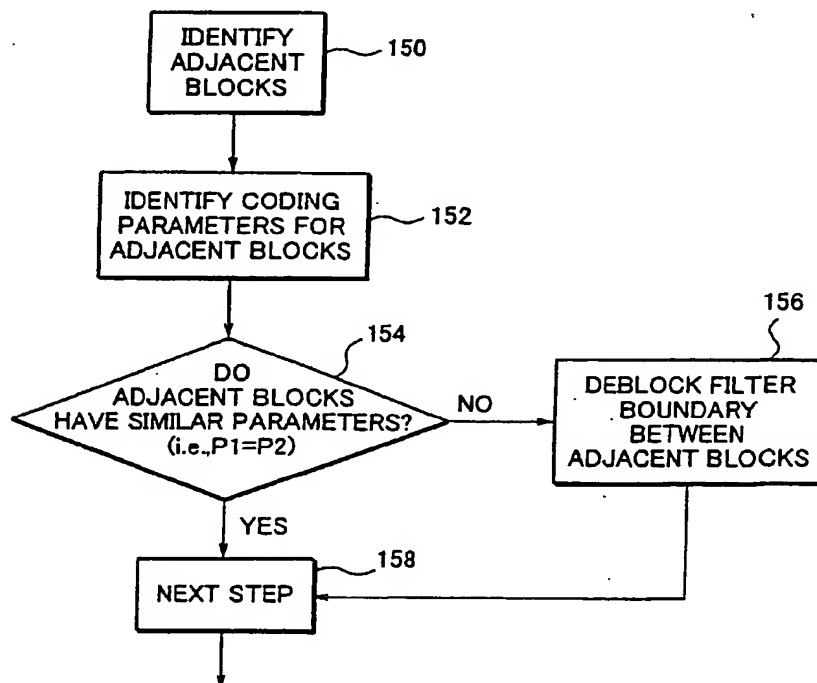

BEST AVAILABLE COPY

EP 1 246 131 A2

## Description

### BACKGROUND

[0001] Block based motion compensated video coding is used in many video compression standards such as H.261, H.263, H.263+, MPEG-1, MPEG-2, and H.26L. The lossy compression process can create visual artifacts in the decoded images, referred to as image artifacts. Blocking artifacts occur along the block boundaries in an image and are caused by the coarse quantization of transform coefficients.

[0002] Image filtering techniques can be used to reduce artifacts in reconstructed images. Reconstructed images are the images produced after being inverse transformed and decoded. The rule of thumb in these techniques is that image edges should be preserved while the rest of the image is smoothed. Low pass filters are carefully chosen based on the characteristic of a particular pixel or set of pixels surrounding the image edges.

[0003] Non-correlated image pixels that extend across image block boundaries are specifically filtered to reduce blocking artifacts. However, this filtering can introduce blurring artifacts into the image. If there are little or no blocking artifacts between adjacent blocks, then low pass filtering needlessly incorporates blurring into the image while at the same time wasting processing resources.

[0004] The present invention addresses this and other problems associated with the prior art.

### SUMMARY OF THE INVENTION

[0005] Adjacent blocks are identified in an image. Coding parameters for the adjacent blocks are identified. Deblocking filtering between the identified adjacent blocks is skipped if the coding parameters for the identified adjacent blocks are similar and not skipped if the coding parameters for the identified adjacent blocks are substantially different.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0006] FIG. 1 is a diagram showing how deblock filtering is selectively skipped according to similarities between adjacent image blocks.

[0007] FIG. 2 is a diagram showing two adjacent image blocks having similar motion vectors.

[0008] FIG. 3 is a diagram showing how transform coefficients are identified for one of the image blocks.

[0009] FIG. 4 is a diagram showing how residual transform coefficients are compared between two adjacent image blocks.

[0010] FIG. 5 is a block diagram showing how the video image is encoded and decoded.

[0011] FIG. 6 is a block diagram showing how deblock filtering is selectively skipped in a codec.

[0012] FIG. 7 shows a table containing the results from selective deblock filter skipping.

[0013] FIG. 8 is a flow chart describing the steps of an embodiment of the present invention in which deblock filtering between adjacent blocks is dependent on similarity of coding parameters in adjacent blocks.

[0014] FIG. 9 is a flow chart describing the steps of an embodiment of the present invention in which deblock filtering between adjacent blocks is dependent on adjacent blocks having similar motion vectors.

[0015] FIG. 10 is a flow chart describing the steps of an embodiment of the present invention in which deblock filtering between adjacent blocks is dependent on adjacent blocks having similar motion vectors that point to the same reference frame.

[0016] FIG. 11 is a flow chart describing the steps of an embodiment of the present invention in which deblock filtering between adjacent blocks is dependent on adjacent blocks having similar motion vectors that point to adjacent reference blocks in a single reference frame.

[0017] FIG. 12 is a flow chart describing the steps of an embodiment of the present invention in which deblock filtering between adjacent blocks is dependent on adjacent blocks having parameters comprising similar D.C. transform coefficients.

[0018] FIG. 13 is a flow chart describing the steps of an embodiment of the present invention in which deblock filtering between adjacent blocks is dependent on adjacent blocks having parameters comprising similar A.C. transform coefficients.

[0019] FIG. 14 is a flow chart describing the steps of an embodiment of the present invention in which deblock filtering between adjacent blocks is dependent on adjacent blocks in a luminance image having parameters comprising similar motion vectors and similar motion vector targets in a reference frame.

[0020] FIG. 15 is a flow chart describing the steps of an embodiment of the present invention in which deblock filtering between adjacent blocks is dependent on adjacent blocks in a luminance image having parameters comprising similar motion vectors, similar motion vector targets in a reference frame and similar transform coefficients.

[0021] FIG. 16 is a flow chart describing the steps of an embodiment of the present invention in which an image is split into separate luminance and chrominance channels and deblock filtering between adjacent blocks in each luminance or chrominance image is dependent on adjacent blocks in a luminance image having parameters comprising similar motion vectors.

[0022] FIG. 17 is a flow chart describing the steps of an embodiment of the present invention in which an image is split into separate luminance and chrominance channels and deblock filtering between adjacent blocks in each luminance or chrominance image is dependent on adjacent blocks in a luminance image having parameters comprising similar motion vectors, similar motion vector targets in a reference frame and similar transform

coefficients.

#### DETAILED DESCRIPTION

[0023] In conventional filtering methods, filter processing only considers a single reconstructed image frame at a time. The motion-vector information available at both the encoder and decoder is not used. If two adjacent blocks share the same motion vector with respect to the same reference image frame, (for a multiple reference frames system) there may be no significant difference between the image residuals of each block. The block boundary of these two adjacent blocks may have been filtered in the reference frame and should therefore not be filtered again for the current frame. If a deblock filter is used without considering this motion-vector information, the conventional filtering process might filter the same boundary again and again from frame to frame. This unnecessary filtering not only causes unnecessary blurring but also results in extra filter computations.

[0024] FIG. 1 shows an image 12 that selectively filters block artifacts according to similarities between image blocks. The image 12 includes multiple image blocks 14 that are each individually encoded before being stored, transmitted, etc. The borders between some of the blocks 14 include blocking artifacts 18. Blocking artifacts are any image discontinuities between blocks 14 that may be created by the encoding process. A low pass filter is used to reduce the blocking artifacts that exist at the borders of adjacent image blocks.

[0025] For example, blocking artifacts 24 exist between blocks 20 and 22. A low pass filter is used at the border 26 between blocks 20 and 22 to remove or reduce the blocking artifacts 24. The low pass filter in one example selects a group of pixels 28 from both sides of the border 26. An average pixel value is derived from the group of pixels 28. Then each individual pixel is compared to the average pixel value. Any pixels in group 28 outside of a predetermined range of the average pixel value is then replaced with the average pixel value.

[0026] As described above, if there are little or no blocking artifacts 24 between the adjacent pixels, then the group of pixels 28 may be needlessly filtered causing blurring in the image and wasting processing resources. A skip mode filtering scheme uses the motion estimation and compensation information for adjacent image blocks. If the motion estimation and compensation information is similar, deblock filtering is skipped. This not only avoids unnecessary image blurring but also significantly reduces the required number of filtering operations.

[0027] For example, it is determined during the encoding process that adjacent image blocks 30 and 32 have similar coding parameters. Accordingly, deblock filtering is skipped for the groups of pixels 34 that extend across the border 31 between adjacent blocks 30 and 32. Skip mode filtering can be used for any horizontal

or vertical boundary between any adjacent blocks in image 12.

[0028] FIG. 2 shows reference frames 42 and 48 and a current frame 40 that is currently being encoded or decoded. Coding parameters for blocks 44 and 46 are compared to determine whether deblock filtering should be skipped between the two adjacent blocks 44 and 46. One encoding parameter that is compared is the Motion Vectors (MV) for the blocks 44 and 46.

[0029] The motion vector MV1 points from block 44 in current image frame 40 to an associated block 44' in the reference frame 42. The motion vector MV2 points from block 46 in current image frame 40 to an associated block 46' in reference frame 42. Skip mode filtering checks to see if the motion vectors MV1 and MV2 point to adjacent blocks in the same reference frame 42. If the motion vectors point to adjacent blocks in the reference frame (MV1=MV2), then deblock filtering is skipped. This motion vector information may be used along with other coding information to decide whether to skip deblock filtering between the two image blocks 44 and 46.

[0030] More than one reference frame may be used during the encoding and decoding process. For example, there may be another reference frame 48. The adjacent blocks 44 and 46 may have motion vectors pointing to different reference frames. In one embodiment, the decision to skip deblock filtering depends on whether the motion vectors for the two adjacent blocks point to the same reference frame. For example, image block 44 may have a motion vector 49 pointing to reference frame 48 and image block 46 may have the motion vector MV2 pointing to reference frame 42. Deblock filtering is not skipped in this example because the motion vectors 49 and MV2 point to different reference frames.

[0031] FIG. 3 shows another coding parameter that may be used to decide whether or not to skip deblock filtering. The image block 44 from image frame 40 is compared with reference block 44' from the reference frame 42 pointed to by the motion vector MV1 as previously shown in FIG. 2. A residual block 44" is output from the comparison between image block 44 and reference block 44'. A transform 50 is performed on the residual block 44" creating a transformed block 44''' of transform coefficients. In one example, the transform 50 is a Discrete Cosine Transform. The transformed block 44''' includes a D.C. component 52 and A.C. components 53.

[0032] The D.C. component 52 refers to a lowest frequency transform coefficient in image block 44. For example, the coefficient that represents the average energy in the image block 44. The A.C. components 53 refer to the transform coefficients that represent the higher frequency components in the image block 44. For example, the transform coefficients that represent the large energy differences between pixels in the image block 44.

[0033] FIG. 4 shows the transformed residual blocks 44''' and 46'''. The D.C. components 52 from the two

transformed blocks 44''' and 46''' are compared in processor 54. If the D.C. components are the same or within some range of each other, the processor 54 notifies a deblock filter operation 56 to skip deblock filtering between the border of the two adjacent blocks 44 and 46. If the D.C. components 52 are not similar, then no skip notification is initiated and the border between blocks 44 and 46 is deblock filtered.

**[0034]** In one embodiment, skip mode filtering is incorporated into the Telecommunications Sector of the International Telecommunication Union (ITU-T) proposed H.26L encoding scheme. The H.26L scheme only uses 4x4 integer Discrete Cosine Transform (DCT) blocks. Here, only the D.C. component of the two adjacent blocks may be checked. However some limited low frequency A.C. coefficients could also be checked when the image blocks are bigger sizes, such as 8x8 or 16x16 blocks. For example, the upper D.C. component 52 and the three lower frequency A.C. transform coefficients 53 for block 44''' may be compared with the upper D.C. component 52 and three lower frequency A.C. transform coefficients 53 for block 46'''. Different combinations of D.C. and/or low frequency A.C. transform coefficients can be used to identify the relative similarity between the two adjacent blocks 44 and 46.

**[0035]** The processor 54 can also receive other coding parameters 55 that are generated during the coding process. These coding parameters include the motion vectors and reference frame information for the adjacent blocks 44 and 46 as described above. The processor 54 uses all of these coding parameters to determine whether or not to skip deblock filtering between adjacent image blocks 44 and 46. Other encoding and transform functions performed on the image may be carried out in the same processor 54 or in a different processing circuit. In the case where all or most of the coding is done in the same processor, the skip mode is simply enabled by setting a skip parameter in the filtering routine.

**[0036]** FIG. 5 shows how skip mode filtering is used in a block-based motion-compensated Coder-Decoder (Codec) 60. The codec 60 is used for inter-frame coding. An input video block from the current frame is fed from box 62 into a comparator 64. The output of a frame buffering box 80 generates a reference block 81 according to the estimated motion vector (and possible reference frame number). The difference between the input video block and the reference block 81 is transformed in box 66 and then quantized in box 68. The quantized transform block is encoded by a Variable Length Coder (VLC) in box 70 and then transmitted, stored, etc.

**[0037]** The encoding section of the codec 60 reconstructs the transformed and quantized image by first Inverse Quantizing (IQ) the transformed image in box 72. The inverse quantized image is then inverse transformed in box 74 to generate a reconstructed residual image. This reconstructed residual block is then added in box 76 to the reference block 81 to generate a reconstructed image block. Generally the reconstructed im-

age is loop filtered in box 78 to reduce blocking artifacts caused by the quantization and transform process. The filtered image is then buffered in box 80 to form reference frames. The frame buffering in box 80 uses the reconstructed reference frames for motion estimation and compensation. The reference block 81 is compared to the input video block in comparator 64. An encoded image is output at node 71 from the encoding section and is then either stored or transmitted.

**[0038]** In a decoder portion of the codec 60, a variable length decoder (VLD) decodes the encoded image in box 82. The decoded image is inverse quantized in box 84 and inverse transformed in box 86. The reconstructed residual image from box 86 is added in the summing box 88 to the reference block 91 before being loop filtered in box 90 to reduce blocking artifacts and buffered in box 92 as reference frames. The reference block 91 is generated from box 92 according to the received motion vector information. The loop filtered output from box 90 can optionally be post filtered in box 94 to further reduce image artifacts before being displayed as a video image in box 96. The skip mode filtering scheme can be performed in any combination of the filtering functions in boxes 78, 90 and 94.

**[0039]** The motion estimation and compensation information available during video coding are used to determine when to skip deblock filtering in boxes 78, 90 and/or 94. Since these coding parameters are already generated during the encoding and decoding process, there are no additional coding parameters that have to be generated or transmitted specially for skip mode filtering.

**[0040]** FIG. 6 shows is further detail how skip mode filtering is used in the filters 78, 90, and/or 94 in the encoder and decoder in FIG. 5. The interblock boundary between any two adjacent blocks "j" and "k" is first identified in box 100. The two blocks may be horizontally or vertically adjacent in the image frame. Decision box 102 compares the motion vector  $mv(j)$  for block j with the motion vector  $mv(k)$  for block k. It is first determined whether the two adjacent blocks j and k have the same motion vector pointing to the same reference frame. In other words, the motion vectors for the adjacent blocks point to adjacent blocks ( $mv(j) = mv(k)$ ) in the same reference frame ( $ref(j) = ref(k)$ ).

**[0041]** It is then determined whether the residual coefficients for the two adjacent blocks are similar. If there is no significant difference between the image residuals of the adjacent blocks, for example, the two blocks j and k have the same or similar D.C. component ( $dc(j) = dc(k)$ ), then the deblock filtering process in box 104 is skipped. Skip mode filtering then moves to the next interblock boundary in box 106 and conducts the next comparison in decision box 102. Skip mode filtering can be performed for both horizontally adjacent blocks and vertically adjacent blocks.

**[0042]** In one embodiment, only the reference frame and motion vector information for the adjacent image

blocks are used to determine block skipping. In another embodiment, only the D.C. and/or A.C. residual coefficients are used to determine block skipping. In another embodiment, the motion vector, reference frame and residual coefficients are all used to determine block skipping.

**[0043]** The skip mode filtering scheme can be applied to spatially sub-sampled chrominance channels. For example in a case with 4:2:0 color format sequences, skip mode filtering for block boundaries may only rely on the equality of motion vectors and D.C. components for the luminance component of the image. If the motion vectors and the D.C. components are the same, deblock filtering is skipped for both the luminance and chrominance components of the adjacent image blocks. In another embodiment, the motion vectors and the D.C. components are considered separately for each luminance and chrominance component of the adjacent blocks. In this case, a luminance or chrominance component for adjacent blocks may be deblock filtered while the other luminance or chrominance components for the same adjacent blocks are not deblock filtered.

**[0044]** FIG. 7 includes a table 110 showing the results of skip mode filtering using a ITU-T H.26L Testing Model-Long TML5.0. Table 110 compares the results of the TML filtering standard with skip mode filtering as described above. Encoding results using skip mode filtering are shown in table 110 under the heading SLA.

**[0045]** There were four images that were tested, Akiyo\_cif for 300 frames at 30 Frames Per Second (fps), Foreman\_cif for 300 frames at 30 fps, Foreman\_qcif for 100 frames at 10 fps, and Tempete\_cif for 260 frames at 30 fps. Quantization Parameters (QP) of 25 and 30 were used. The results show no significant visual quality degradation with the skip mode filtering. The Picture Signal to Noise Ratio (PSNR) for the images stays approximately the same for the luminance Y and chrominance U and V channels. However, skip mode filtering provides time savings of 40-70 percent.

**[0046]** Skip mode filtering can be used with any system that encodes or decodes multiple image frames. For example, DVD players, video recorders, or any system that transmits image data over a communications channel, such as over television channels or over the Internet.

**[0047]** The skip mode filtering described above can be implemented with dedicated processor systems, micro controllers, programmable logic devices, or microprocessors that perform some or all of the operations. Some of the operations described above may be implemented in software and other operations may be implemented in hardware.

**[0048]** For the sake of convenience, the operations are described as various interconnected functional blocks or distinct software modules. This is not necessary, however, and there may be cases where these functional blocks or modules are equivalently aggregated into a single logic device, program or operation with

unclear boundaries. In any event, the functional blocks and software modules or described features can be implemented by themselves, or in combination with other operations in either hardware or software.

**[0049]** Some embodiments of the present invention may be described with reference to Figure 8. In these systems and methods, adjacent blocks 150 in a video frame are identified and coding parameters for these adjacent blocks are identified. The coding parameters for the adjacent blocks are then compared to determine their similarity 154. When the coding parameters are not similar, a deblock filter 156 is applied along the boundary between the adjacent blocks. When the coding parameters are similar, deblock filtering is skipped and the process proceeds to the next step 158. Likewise, when deblock filtering is performed, the process proceeds to the next step 158 after filtering.

**[0050]** In some embodiments of the present invention, as shown in Figure 9, the coding parameters are motion vectors. In these embodiments, adjacent blocks in a video frame are identified 160 and coding parameters 162 comprising motion vectors are identified. These motion vectors are compared to determine their similarity 164. When the motion vectors are not similar, deblock filtering may be performed 166 between the adjacent blocks and the process may proceed to its next step 168. When the motion vectors are similar, deblock filtering is skipped and the next step 168 is accomplished directly.

**[0051]** Other embodiments of the present invention, as shown in Figure 10, may use multiple coding parameters to determine whether to skip filtering. In these embodiments, adjacent blocks are identified 170 and coding parameters 172 are determined for the adjacent blocks. These coding parameters may comprise motion vector attributes including the target frame of the motion vectors. When motion vectors of adjacent blocks are not similar 174, deblock filtering may be performed 176 between the adjacent blocks. When motion vectors are similar 174, other parameters may be used to further qualify the filtering process. In this example, the motion vectors may be compared to determine whether they point to the same reference frame 178. If the vectors do not point to the same reference frame, deblock filtering may be performed between the blocks 176. If the vectors point to the same reference frame, filtering may be skipped and the process may proceed to the next step 179.

**[0052]** Further motion vector parameters may be used to determine filtering. In embodiments illustrated in Figure 11, the location of the blocks to which vectors point is a parameter that may be used to determine filtering options. In these embodiments, adjacent blocks are identified 200 and coding parameters are identified for the adjacent blocks 202. Motion vectors are then compared to determine their similarity 204. If the vectors are not similar, deblock filtering may proceed 208. If motion vectors are similar, another comparison may be made to determine whether the motion vectors of the

adjacent blocks point to the same reference frame. If the vectors don't point to the same frame, deblock filtering may proceed 208. If the vectors do point to the same reference frame, the blocks to which the vectors point may be compared 210. When motion vectors do not point to adjacent blocks in the same reference frame, deblock filtering may proceed 208. When the vectors point to adjacent blocks in the same reference frame, deblock filtering may be skipped and a next step 212 may be executed. In this manner, adjacent blocks which reference adjacent blocks in a reference frame and which are not likely to have significant artifacts therebetween are not deblock filtered. This deblock filter skipping avoids any blurring and image degradation caused by the filtering process. Processing time is also conserved as unnecessary filtering is avoided. Image quality is thereby improved and fewer calculations are required in the process. It should be noted that various combinations of these motion vector parameters may be used to determine filter skipping. These myriad combinations are not specifically described in detail, but are thought to be within the grasp of one skilled in the art and are intended to fall within the scope of the appended claims.

**[0053]** Further embodiments of the present invention may utilize transform coefficients to determine whether deblock filtering should occur. In reference to Figure 12, adjacent blocks 180 in a frame are identified and coding parameters are identified for the adjacent blocks 182. These coding parameters may comprise motion vector parameters as well as transform coefficients.

**[0054]** Motion vectors are then compared 184 to determine similarity. If the motion vectors are not similar, deblock filtering may be performed 186. If the motion vectors are similar, the motion vector data is analyzed to determine whether the motion vectors point to the same reference frame. If the motion vectors do not point to the same reference frame 185, filtering may proceed 186.

**[0055]** If the motion vectors point to the same reference frame 185, transform coefficients may be compared to further qualify filtering processes. In this example, DC transform coefficients obtained through Discrete Cosine Transform (DCT) methods or other methods may be compared for the adjacent blocks. If the DC transform coefficients are not similar 187, deblock filtering may be performed 186. If the DC transform coefficients are similar, filtering may be skipped and the methods and systems may proceed to the next step 188.

**[0056]** Still other embodiments of the present invention may utilize AC transform coefficients to determine filtering options. In reference to Figure 13, embodiments similar to those described in relation to Figure 12 are illustrated with the additional steps of evaluating AC transform coefficients. In these embodiments, blocks 190 and their coding parameters 191 are identified. Similarities in motion vectors 192, motion vector target frames 193 and DC transform coefficients are also com-

pared 194. When similarities in these parameters exist, AC transform coefficients are compared 196 and, if they are similar, deblock filtering is skipped and the next step in the process is executed 197. If the AC coefficients are not similar, filtering is performed between the adjacent blocks and the process proceeds on to the next step 197.

**[0057]** AC transform coefficients are more likely to have significance in larger blocks, but can be used in methods utilizing smaller blocks such as 4x4 blocks.

**[0058]** In some embodiments of the present invention, an image may be separated into various luminance and chrominance channels depending on the format of the image and the color space utilized. In the following examples, a YUV color space is described, however, many other formats and color spaces may be used in these embodiments. CieLAB, YcrCb and other spaces may be used. In alternative embodiments color spaces such as RGB may be used.

**[0059]** Some embodiments of the present invention may be described in relation to Figure 14. In these embodiments, luminance data is extracted from the image and a luminance image is created 220. Adjacent blocks are then identified in the luminance image 222 and coding parameters for the adjacent blocks are also identified 224. As in other embodiments, the motion vectors of the adjacent blocks are compared to determine similarities 226. When the motion vectors are not similar, deblock filtering is performed 230, when the vectors are similar further analysis is performed to determine whether the vectors point to the same reference frame 228. When the vectors point to different reference frames, deblock filtering is performed between the adjacent blocks 230 of the original image that correspond to the adjacent blocks in the luminance image. When the vectors point to the same frame, deblock filtering is skipped and the next step is executed without prior filtering 232. When filtering is performed, the next step is executed 232 after the filtering processes. Accordingly, analysis of data in the luminance channel is used to determine filtering processes in the original image, which contains both luminance and chrominance data.

**[0060]** In other related embodiments, illustrated in Figure 15, a luminance image is created 240 and corresponding adjacent blocks are identified in the luminance and original image 242. Coding parameters are also identified for the luminance image blocks 244. Subsequently, motion vectors are compared to determine similarities 246. If significant similarities do not exist, filtering is performed between the adjacent blocks in the original image 252. If motion vectors are similar, the target frames of the motion vectors are compared to determine whether the vectors point to the same reference frame. If the vectors do not point to the same reference frame, filtering is performed. If the vectors point to the same reference frame, transform coefficients of the luminance (Y) image are compared. If Y transform coefficients are not similar, filtering is performed. If transform coeffi-

cients are similar, filtering is skipped and the next step 254 is executed. Likewise, the next step is executed 254 after any filtering operation.

[0061] Images may be further divided into component channels that generally correspond to luminance and chrominance channels. In some embodiments of the present invention, each channel may be filtered according to parameters unique to that channel.

[0062] As an example, embodiments may be described with reference to Figure 16, wherein an image is divided into separate luminance (Y) and multiple chrominance (U, V) channels 260. In these embodiments adjacent blocks are identified in images corresponding to each channel 262, 272, 282. Coding parameters, such as motion vectors data, are also identified for these blocks in each channel 264, 274, 284. These coding parameters may then be compared to determine similarities as in other embodiments. In these exemplary embodiments, motion vector similarities for channel-specific motion vectors may be used to determine filtering options in each channel. When the motion vectors for a channel image are not similar 266, 276, 286, filtering is performed in that specific channel between the adjacent blocks 270, 280, 290. If the motion vectors are similar, the target reference frames are compared 268, 278, 288. When the vectors for adjacent blocks in a channel point to the same reference frame, filtering is skipped. When the vectors point to different reference frames filtering is performed 270, 280, 290.

[0063] As in other embodiments, these channelized embodiments may utilize transform coefficient data to qualify filtering options. As shown in Figure 17, the methods and systems described in relation to Figure 16 may further compare channel transform coefficients 310, 322, 334. When the coefficients are not similar, filtering is performed 312, 324, 336. When the coefficients are similar, filtering is skipped.

[0064] It should be noted that various combinations of parameters may be employed in qualifying filtering operations in each channel. DC and AC transform coefficients may be utilized for these embodiments. Furthermore, various channels and combinations of channels may be used to determine filtering options and perform filtering. For example, both chrominance channels may be combined and analyzed together in some embodiments. Data and parameters from one channel may also be used to determine filtering options in another channel. For example, parameters taken from the U chrominance channel may be compared to determine filtering options in the V chrominance channel and vice versa.

[0065] Having described and illustrated the principles of the invention in various exemplary embodiments thereof, it should be apparent that the invention may be modified in arrangement and detail without departing from such principles. Claim is made to all modifications and variations coming within the spirit and scope of the following claims.

## Claims

1. A method for selective image filtering, said method comprising:

identifying (100) adjacent blocks in the image;  
identifying (102) coding parameters for the adjacent blocks;  
skipping deblock filtering between the identified adjacent blocks when the identified coding parameters for the identified adjacent blocks are similar; and  
deblock filtering (104) between the identified adjacent blocks when the identified coding parameters for the identified adjacent blocks are not similar.

2. A method according to claim 1 wherein said identified coding parameters (55) comprise motion vectors (49, MV1, MV2).

3. A method according to claim 1 wherein said identified coding parameters (55) comprise reference image frames (42, 48).

4. A method according to claim 1 wherein said identified coding parameters (55) comprise transform coefficients.

5. A method according to claim 1 wherein said identified coding parameters (55) comprise D.C. components (52) in the transform coefficients.

6. A method according to claim 1 wherein said identified coding parameters (55) comprise A.C. components (53) in the transform coefficients.

7. A method according to claim 1 wherein said identified coding parameters (55) comprise at least one parameter taken from the group consisting of motion vector (49, MV1, MV2) data, reference image frame (42, 48) data, reference image block (44', 46') data, D.C. component (52) data in a transform coefficient and A.C. component (53) data in a transform coefficient.

8. A method for performing one of encoding or decoding an image, comprising:

identifying (100) adjacent blocks in the image;  
identifying (102) coding parameters for the adjacent blocks;  
skipping deblock filtering between the identified adjacent blocks when the coding parameters for the identified adjacent blocks are similar; and  
deblock filtering (104) between the identified adjacent blocks when the coding parameters



for the identified adjacent blocks are not similar.

9. A method according to claim 8 including skipping deblock filtering (104) when the adjacent blocks (44, 46) have similar motion vectors (49, MV1, MV2) pointing to a same reference image frame (42).

10. A method according to claim 8 including:

identifying transform coefficients for the adjacent blocks (44, 46); and  
skipping deblock filtering between the adjacent blocks (44, 46) when the transform coefficients are similar.

11. A method according to claim 10 including:

identifying D.C. components (52) in the transform coefficients; and  
skipping deblock filtering between the adjacent blocks (44, 46) when the D.C.

components (52) are the same or similar.

12. A method according to claim 11 including:

identifying A.C. components (53) in the transform coefficients; and  
skipping deblock filtering between the adjacent blocks (44, 46) when the D.C.

components (52) and A.C. components (53) are the same or similar.

13. A method according to claim 10 including transforming the adjacent blocks (44, 46) using a Discrete Cosine Transform (50) to generate the transform coefficients.

14. A method according to claim 8 including:

comparing blocks (44, 46) in the image (12) with reference frames (42, 48);  
transforming the result of the comparison between the reference frames (42, 48) and the blocks (44, 46) in the image into transformed blocks (44', 46') having transform coefficients; comparing the similarities between the transform coefficients; and  
skipping deblock filtering between adjacent blocks (44, 46) in the image (12) according to the results of the comparison between the transform coefficients.

15. A method according to claim 14 wherein the transform coefficients include D.C. transform coefficients.

16. A method according to claim 8 including controlling deblock filtering for a loop filter (78) in an image coder.

17. A method according to claim 8 including controlling deblock filtering in one or both of a loop filter (90) and a post filter (94) in an image decoder.

18. A method according to claim 8 including:

identifying similarities between coding parameters (55) in a luminance channel of the adjacent blocks; and  
controlling deblock filtering for both the luminance channel and a chrominance channel in the image according to identified similarities in the luminance channel.

19. A method according to claim 8 including selectively skipping deblock filtering in any one of a H.261, H.263, H263+, MPEG-1, MPEG-2, or H26L encoding standard according to coding parameter (55) similarities between adjacent image blocks (44, 46).

20. A codec for at least one of encoding or decoding an image (12), said codec comprising:

a block identifier for identifying adjacent blocks (44, 46) in the image (12);  
a parameter identifier for identifying coding parameters (55) for said adjacent blocks (44, 46);  
a comparator for comparing said coding parameters (55) for said adjacent blocks (44, 46); and  
a filter selector for selective enablement of at least one filter, said selector operating in response to a comparison of said coding parameters (55),

wherein said at least one filter is enabled when said coding parameters (55) are not similar and said at least one filter is disabled when said coding parameters (55) are similar.

21. A codec according to claim 20 wherein said identified coding parameters (55) comprise at least one parameter taken from the group consisting of motion vector (49, MV1, MV2) data, reference image frame (42, 48) data, reference image block (44', 46') data, D.C. component (52) data in a transform coefficient and A.C. component (53) data in a transform coefficient.

22. A method for selective image filtering, said method comprising:

dividing an original image into a plurality of channels;  
identifying adjacent blocks (44, 46) in at least



one of said channels;  
identifying coding parameters (55) in said at  
least one channel;  
comparing said coding parameters (55);  
filtering said original image between said adja- 5  
cent blocks (44, 46) when said coding param-  
eters (55) are dissimilar and skipping filtering  
said original image between said adjacent  
blocks (44, 46) when said coding parameters  
(55) are similar. 10

**23. A method for selective image filtering, said method  
comprising:**

dividing an original image into a plurality of 15  
channels, said channels comprising a lumi-  
nance channel and at least one chrominance  
channel wherein each channel comprises a  
channel image;  
identifying adjacent blocks (44, 46) in at least 20  
one of said channels;  
identifying coding parameters (55) in said at  
least one channels;  
comparing said coding parameters (55);  
filtering said channel images between said ad- 25  
jacent blocks (44, 46) when said coding param-  
eters (55) for said channels are dissimilar and  
skipping said filtering when said coding param-  
eters (55) are similar.

30

35

40

45

50

55

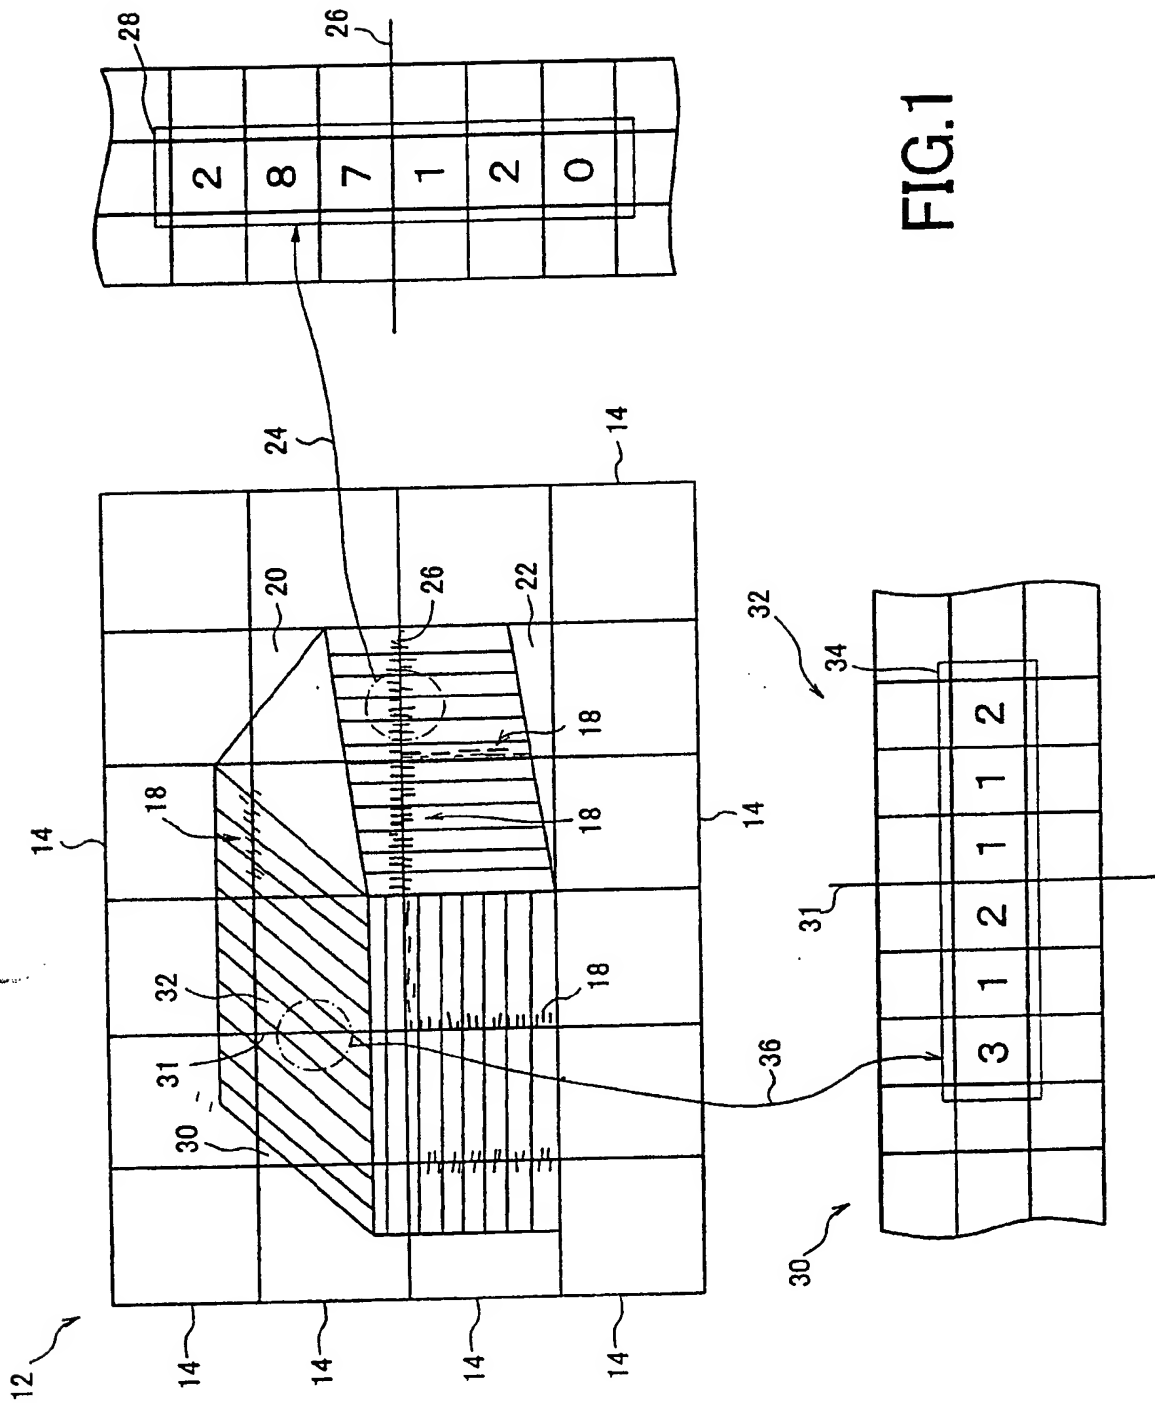


FIG. 1

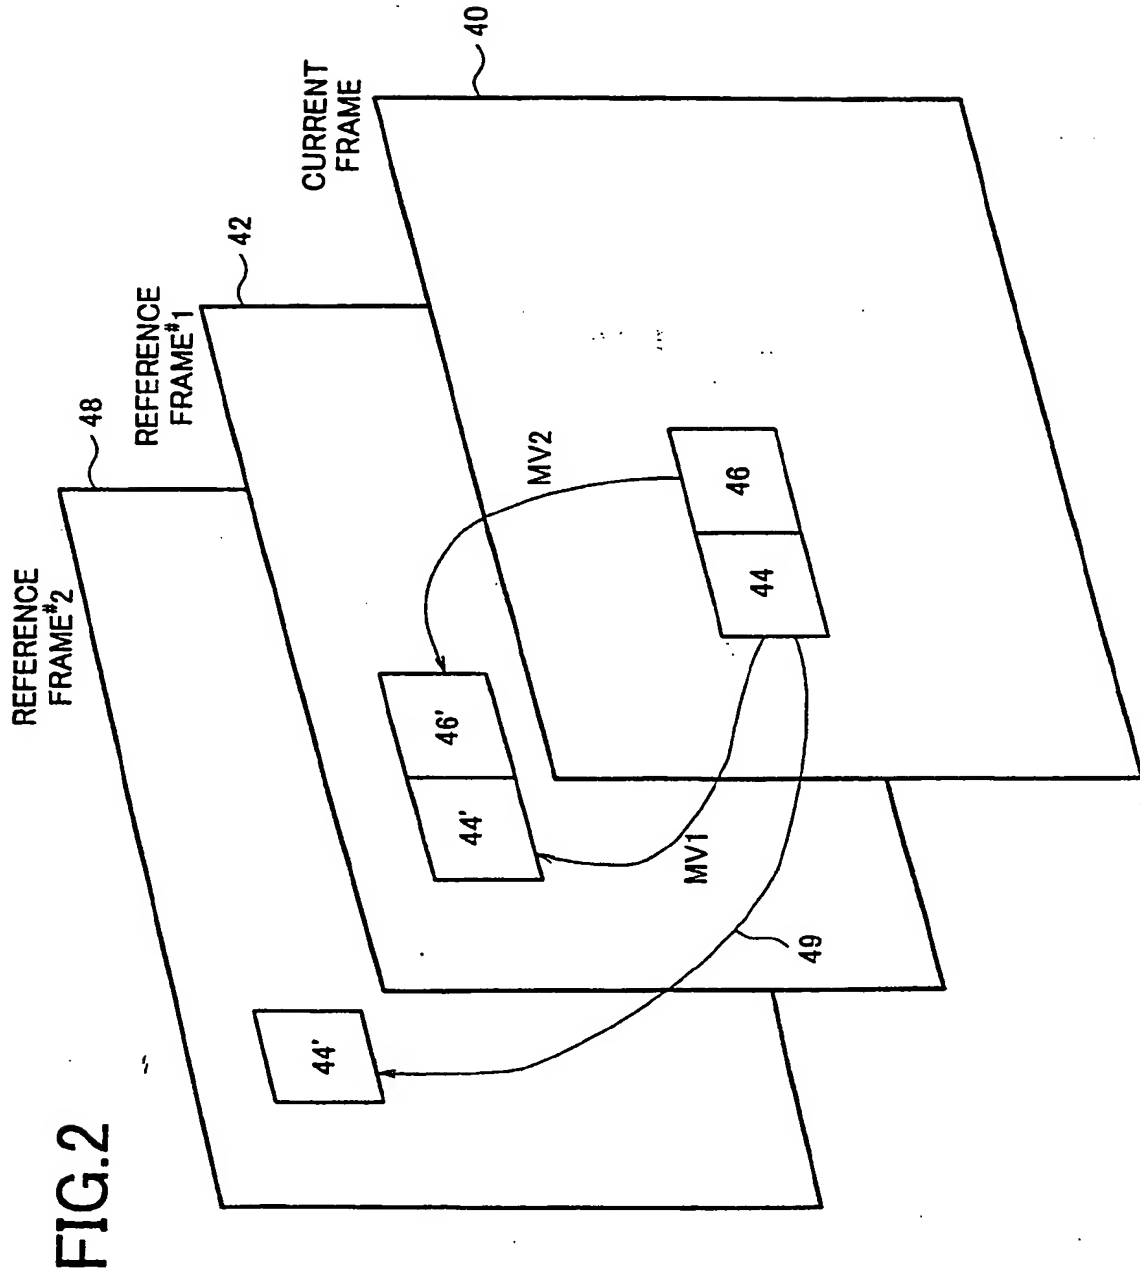
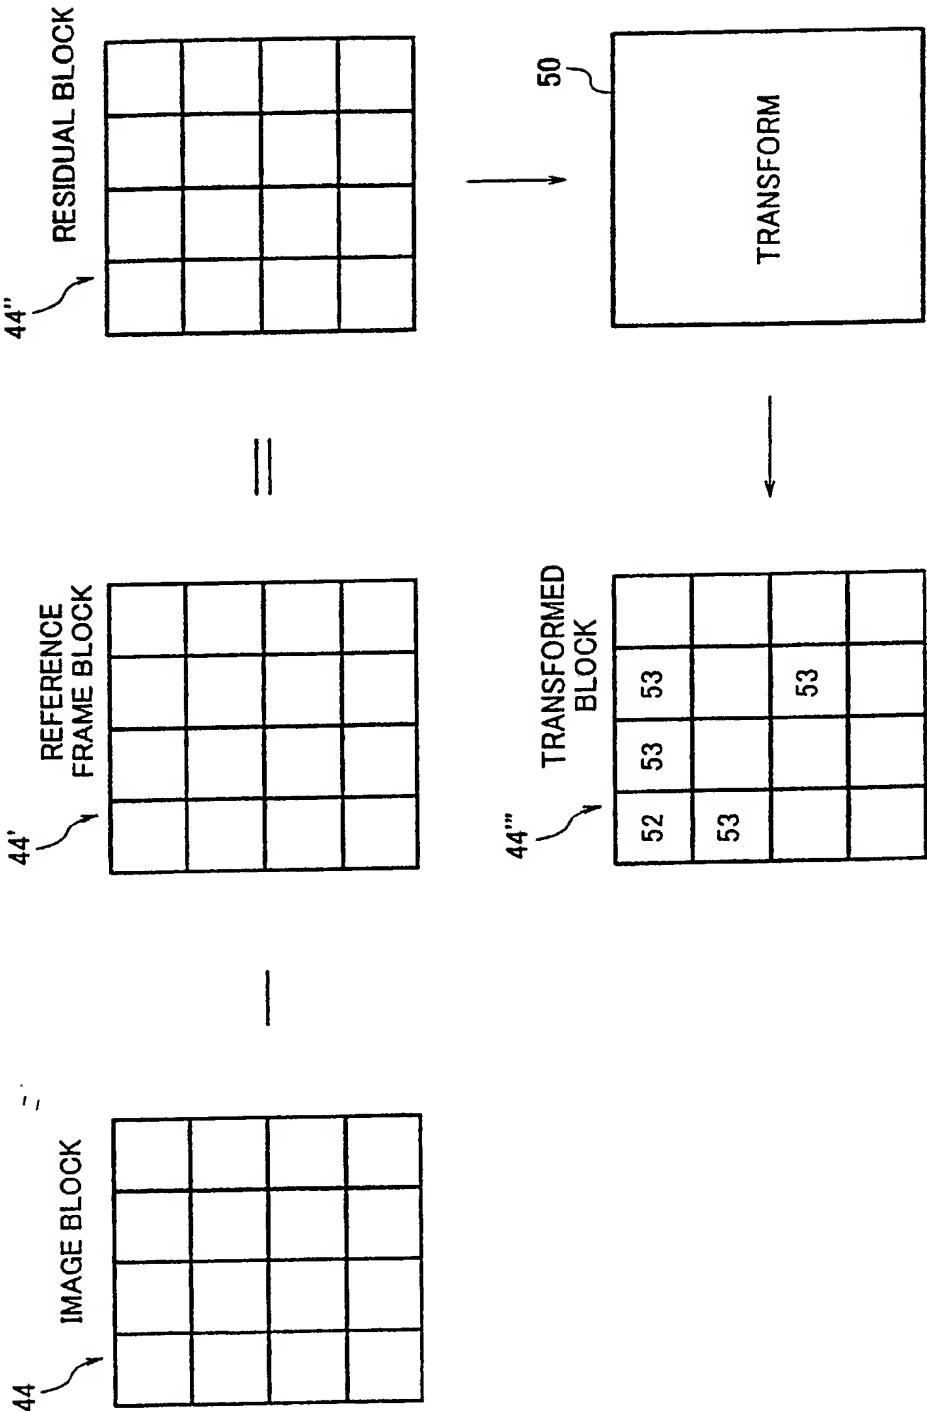


FIG.3



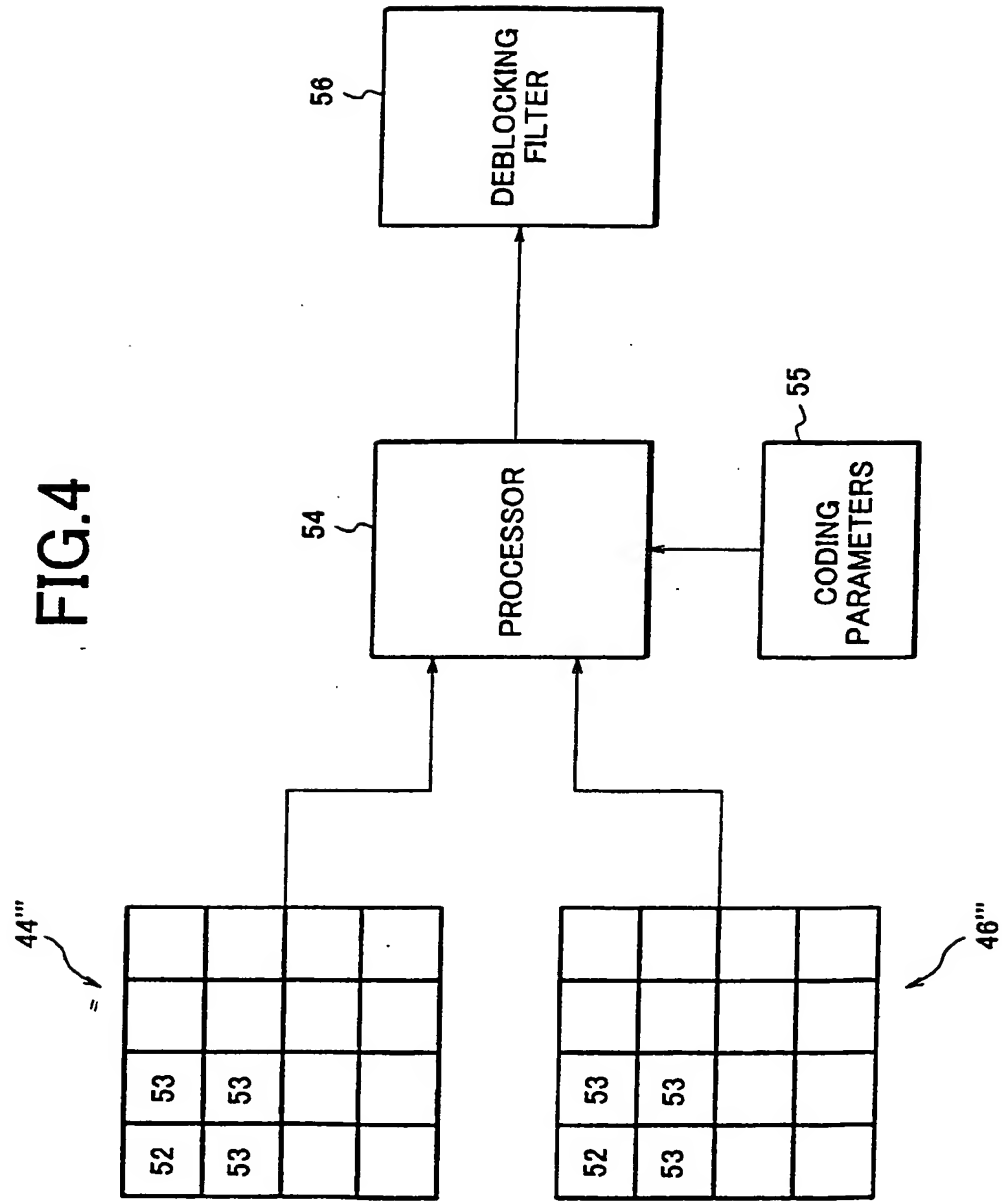


FIG.5

60

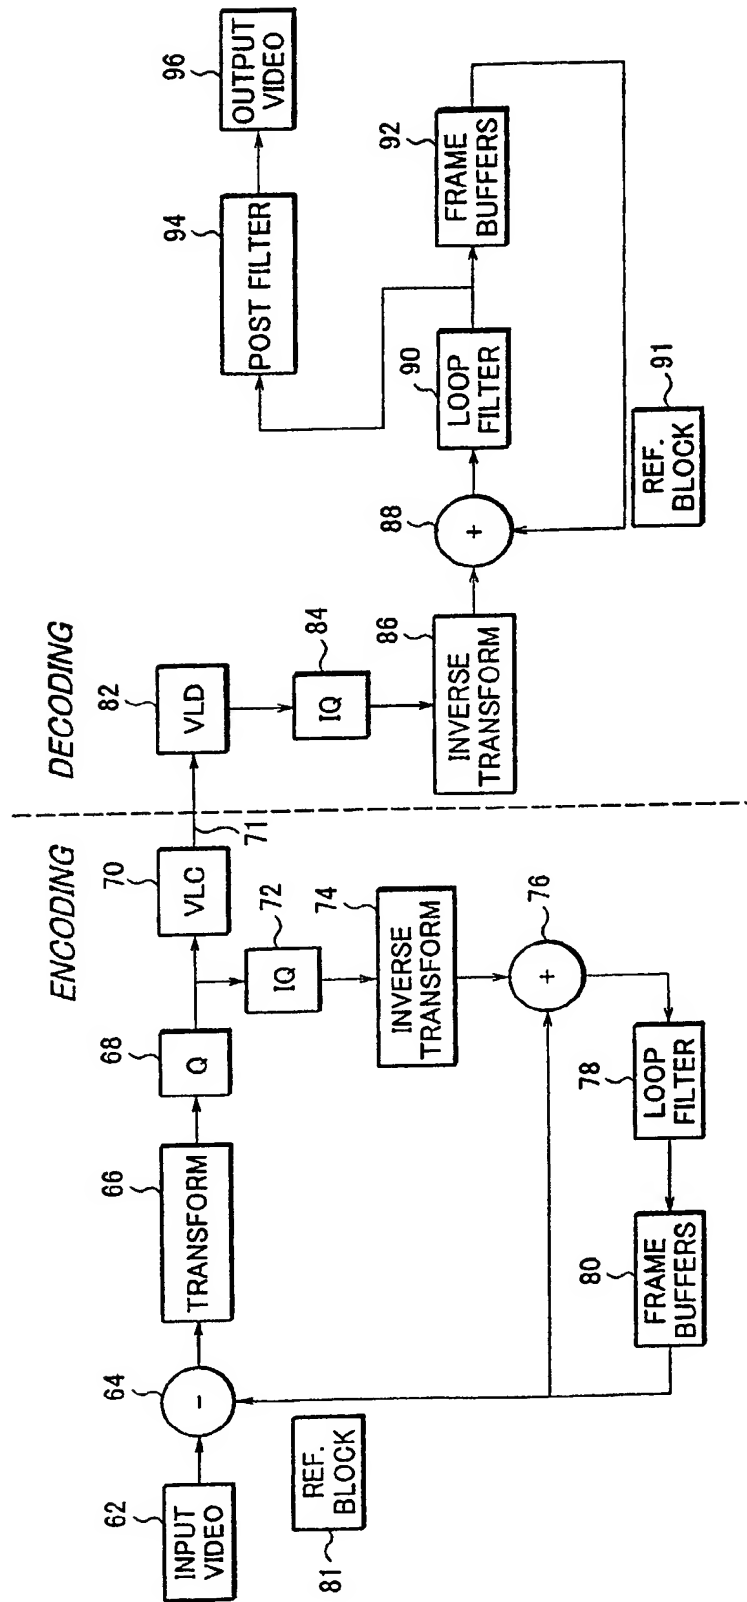


FIG. 6

78,90,94

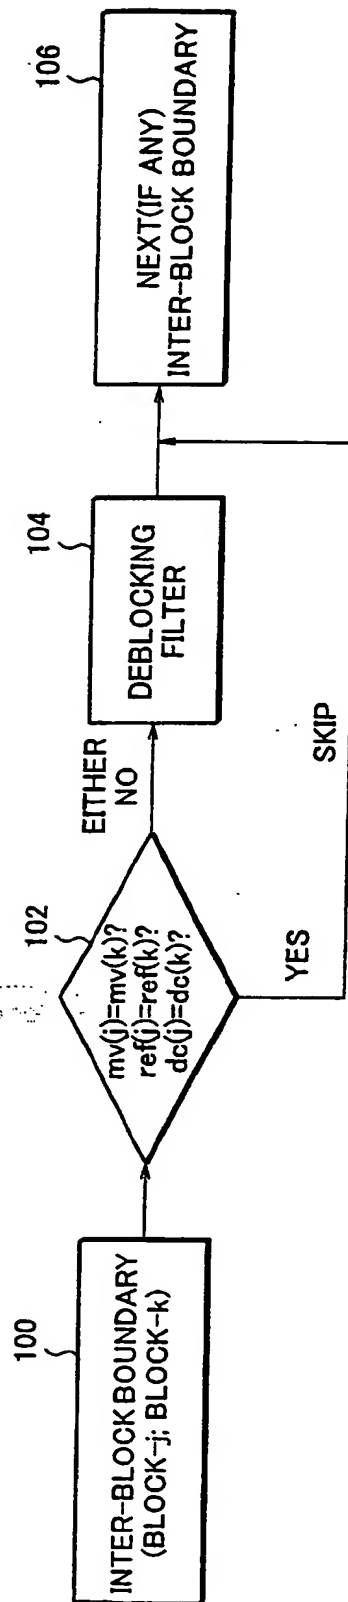




FIG.7

110

TABLE 1.COMPARISON BETWEEN TML AND THE PROPOSED LOOP FILTERING SCHEME

VIDEO SEQUENCE	QP	BITRATE(bps)		PSNR(Y)		PSNR(U)		PSNR(V)		NEW LOOP FILTER RELATIVE TITE SAVING
		TML	SLA	TML	SLA	TML	SLA	TML	SLA	
AKIYO_cif 300 FRAMES @ 30fps	25	33151	32346	34.050	34.161	38.934	39.042	40.300	40.369	63.0%
	30	22775	22295	30.797	30.920	36.610	36.964	38.680	38.771	68.2%
FOREMAN_cif 300 FRAMES @ 30fps	25	165115	162740	30.835	31.006	38.124	38.174	38.966	39.030	43.1%
	30	101357	100215	27.580	27.836	36.745	36.811	37.267	37.362	42.1%
FOREMAN_qcif 100 FRAMES @ 10fps	25	28681	28677	29.822	29.931	37.586	37.631	37.773	37.938	38.4%
	30	15999	15822	26.250	26.435	36.432	36.323	36.222	36.283	41.3%
TEMPETE_cif 260 FRAMES @ 30fps	25	336200	329115	28.277	28.490	33.982	34.143	36.009	36.184	45.3%
	30	168133	159789	24.583	24.927	32.334	32.628	34.512	34.799	50.6%

FIG.8

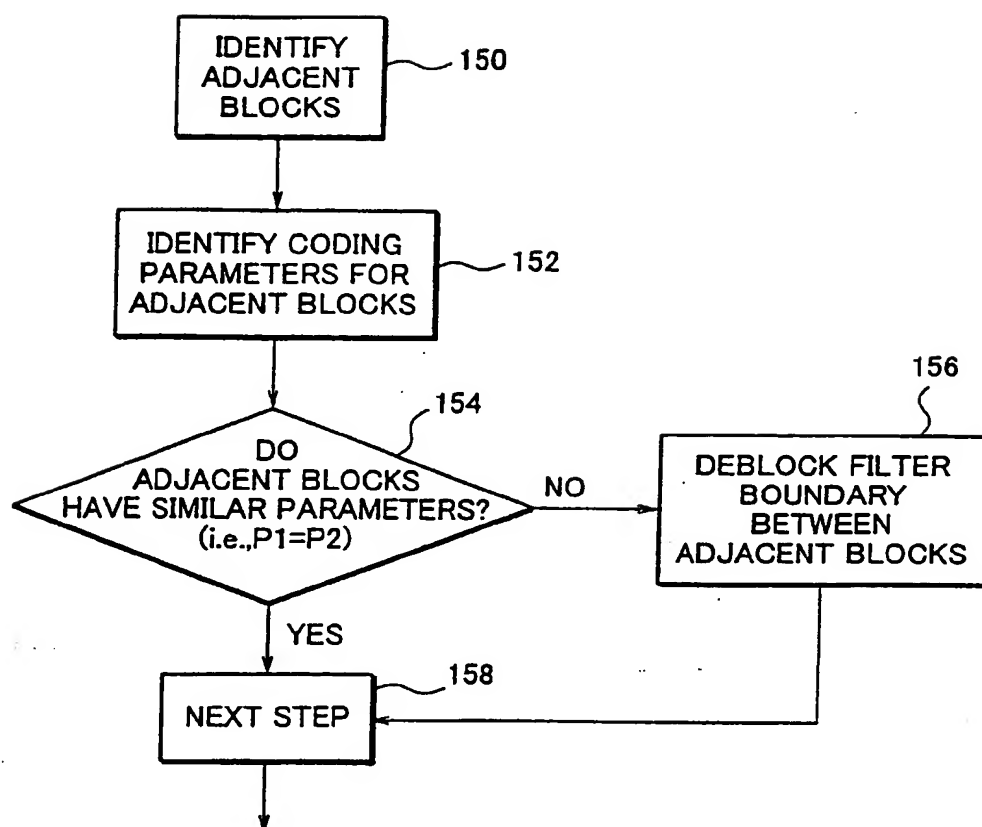


FIG.9

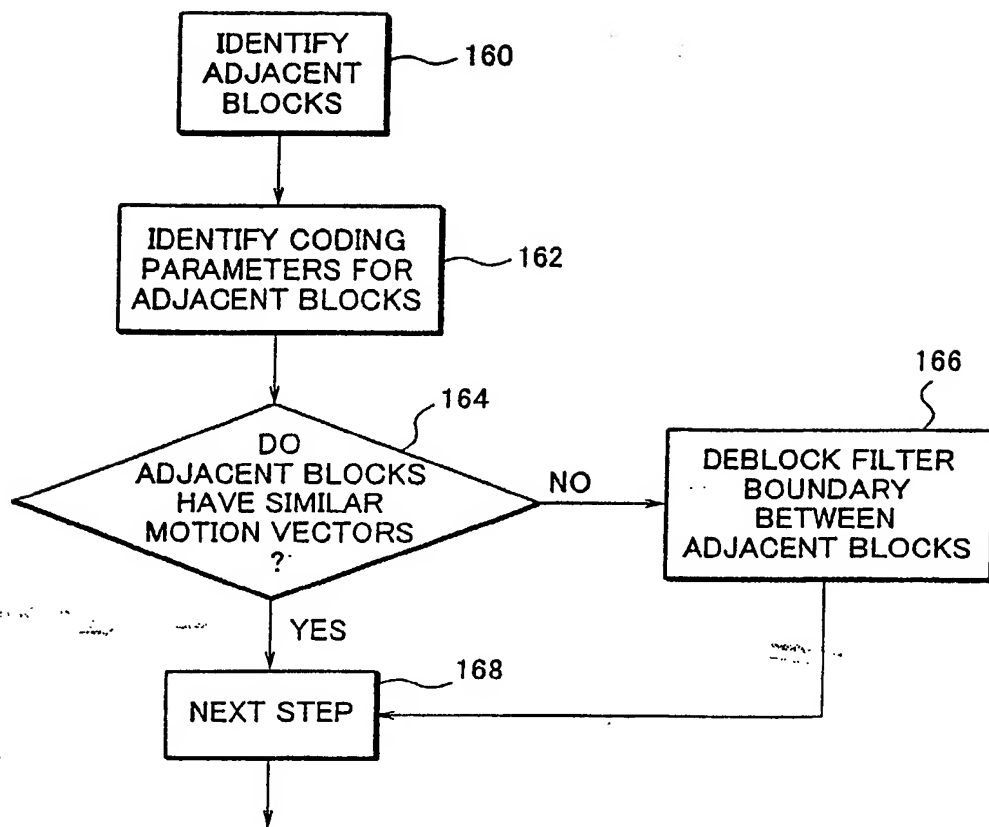


FIG.10

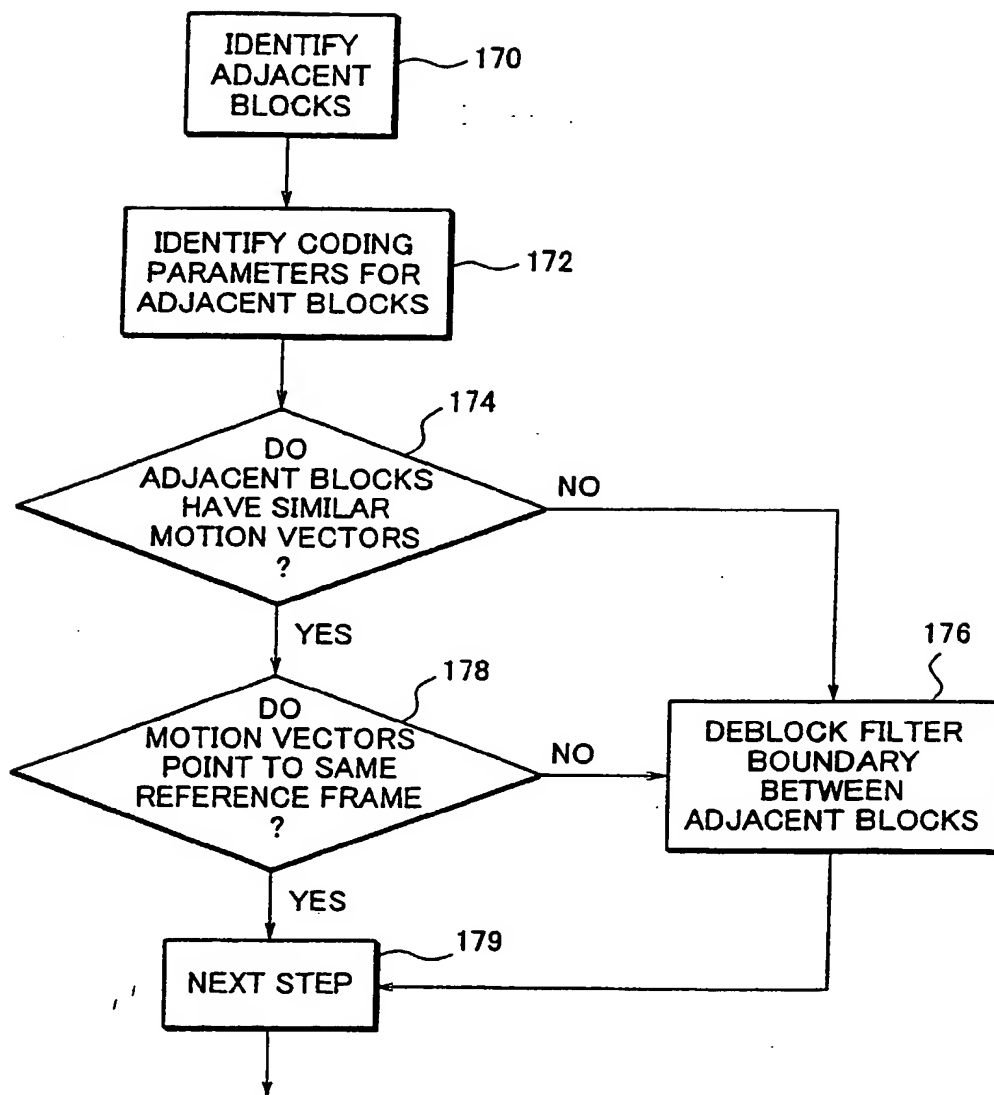


FIG. 11

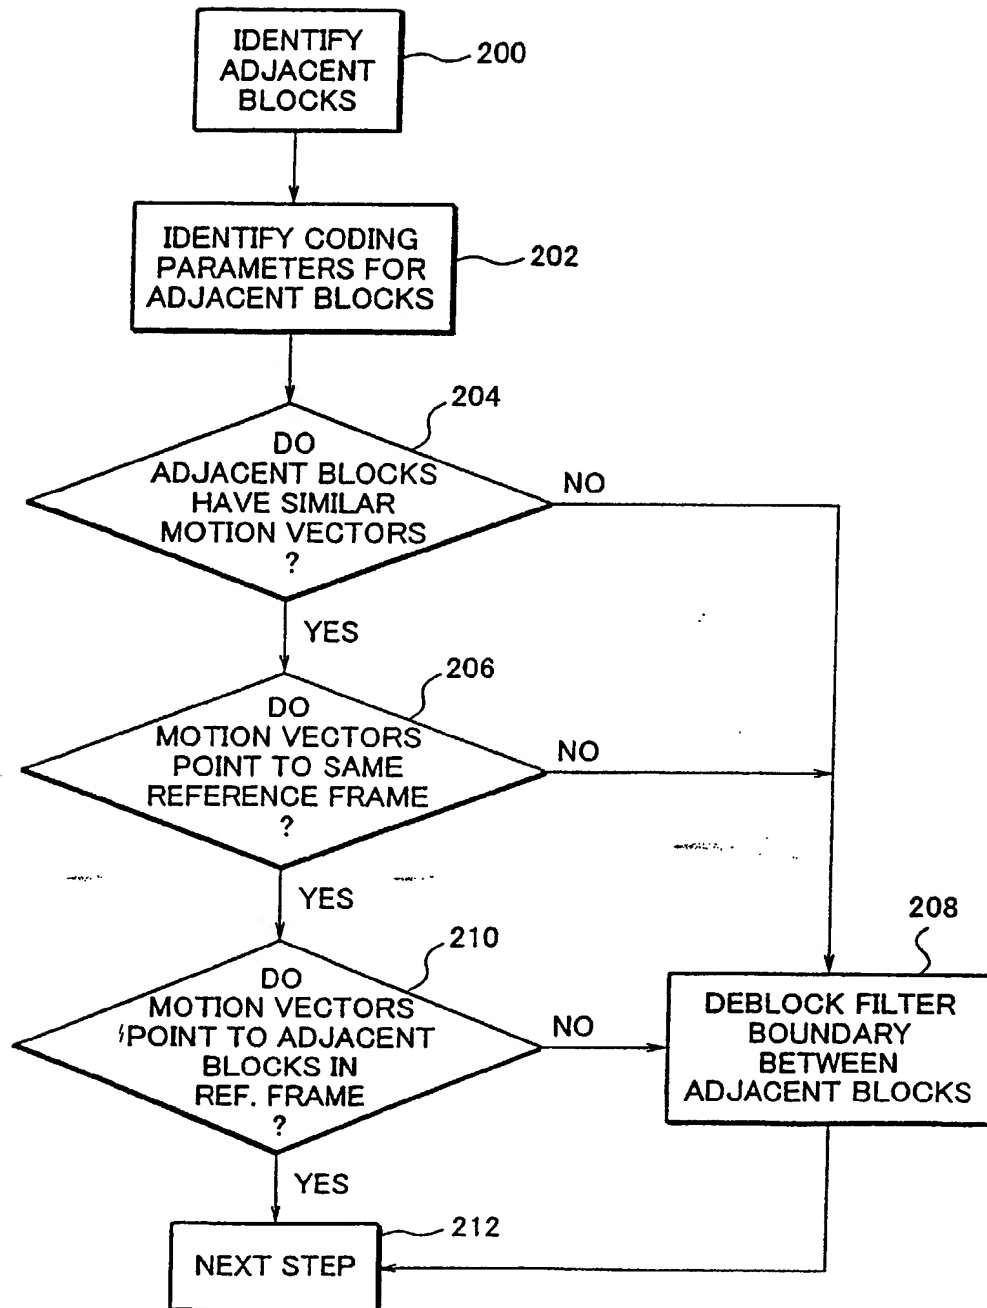


FIG.12

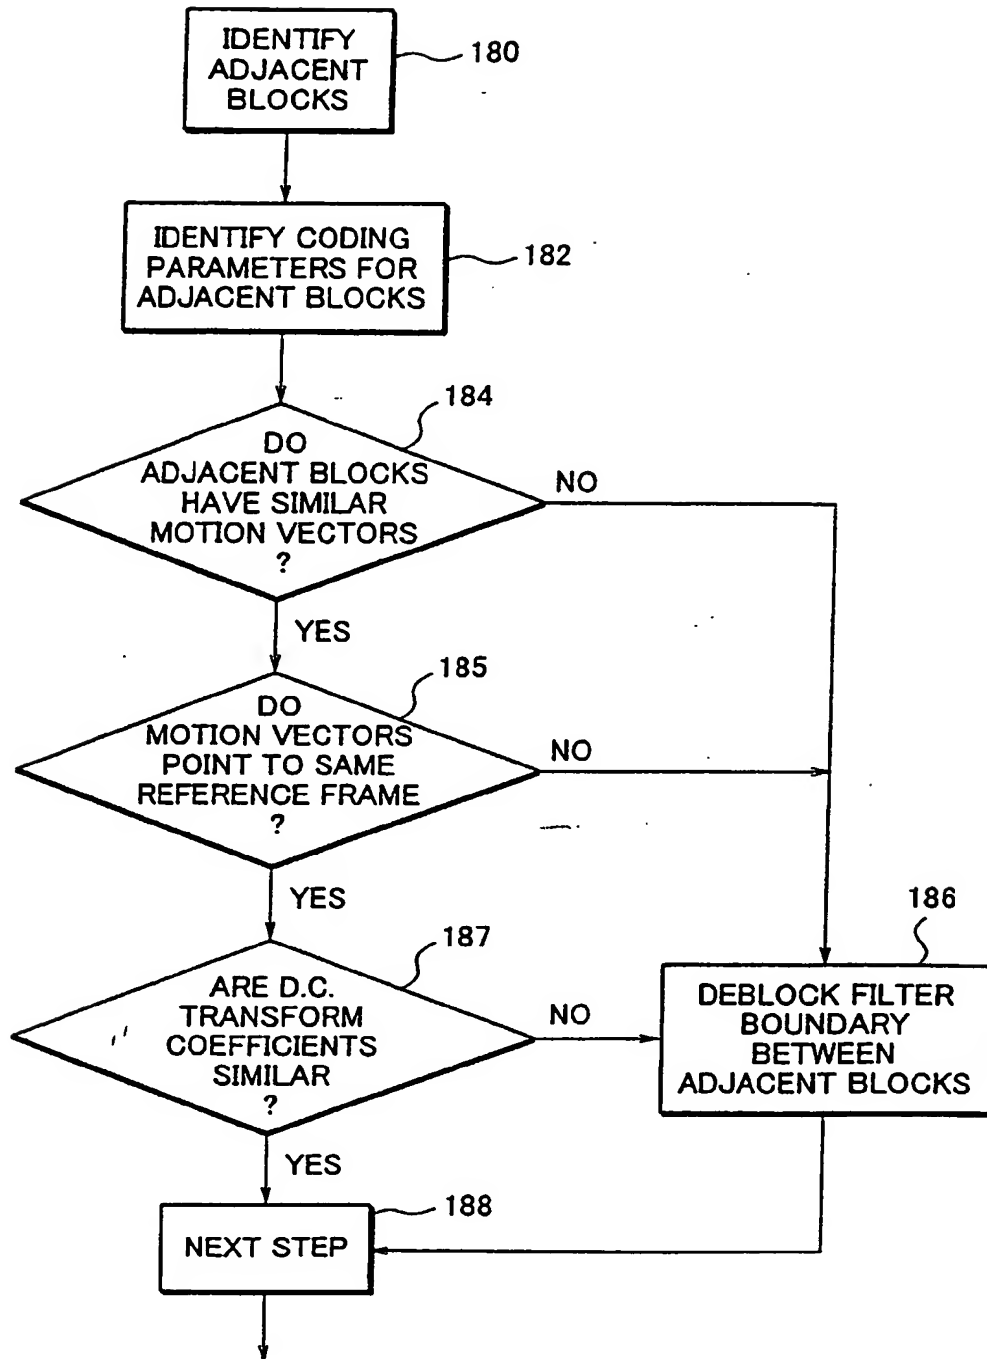


FIG.13

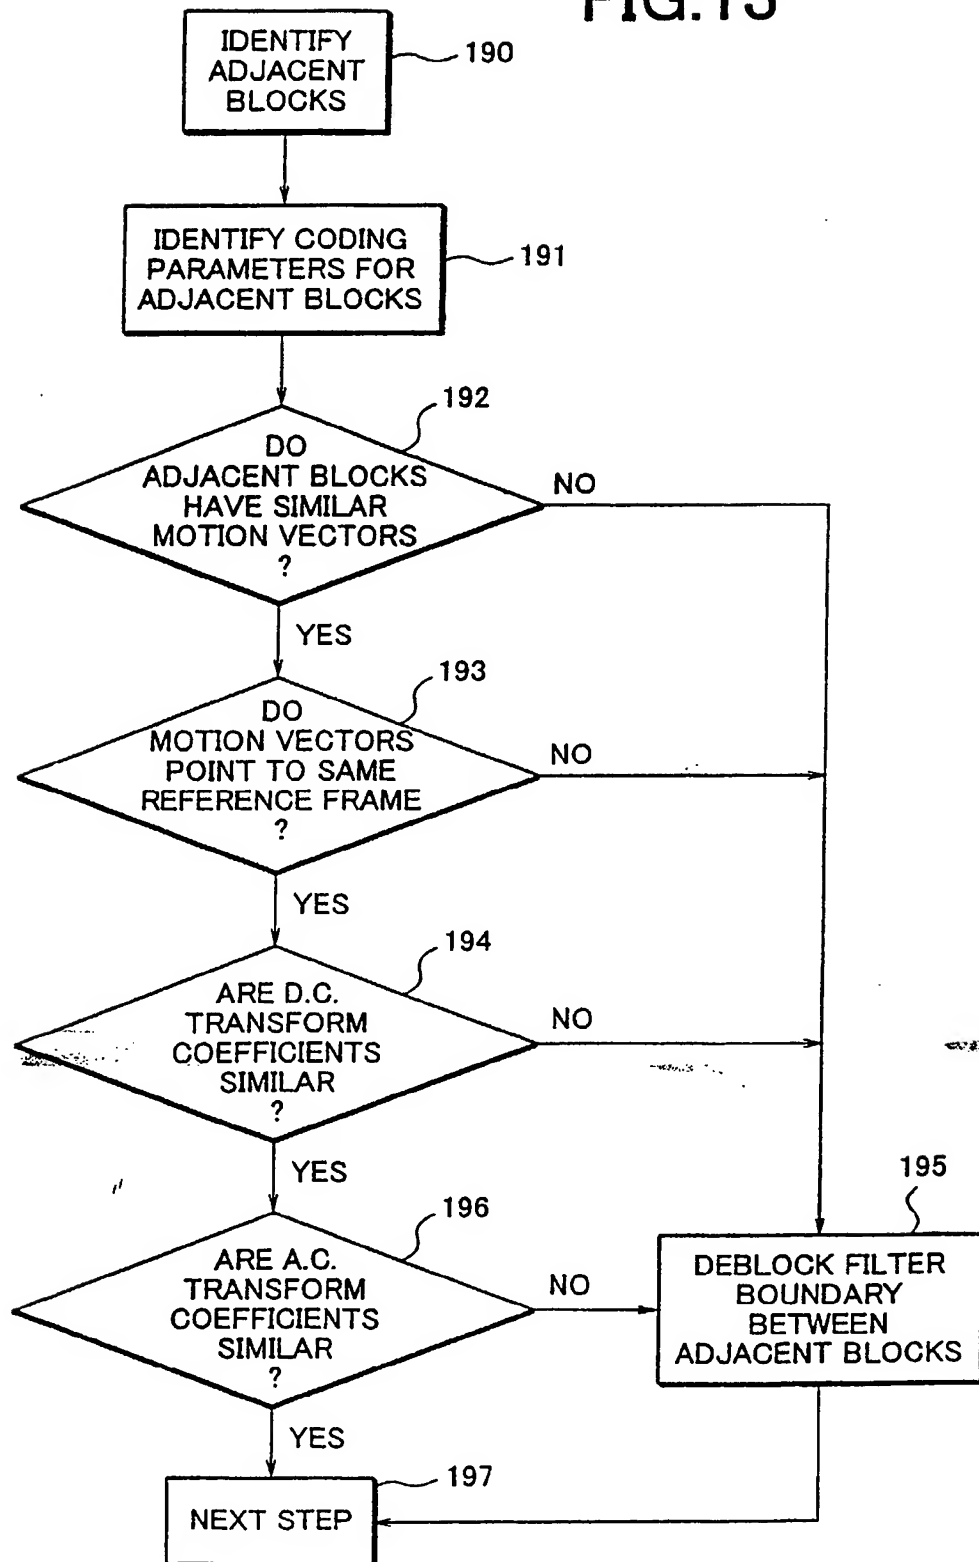




FIG.14

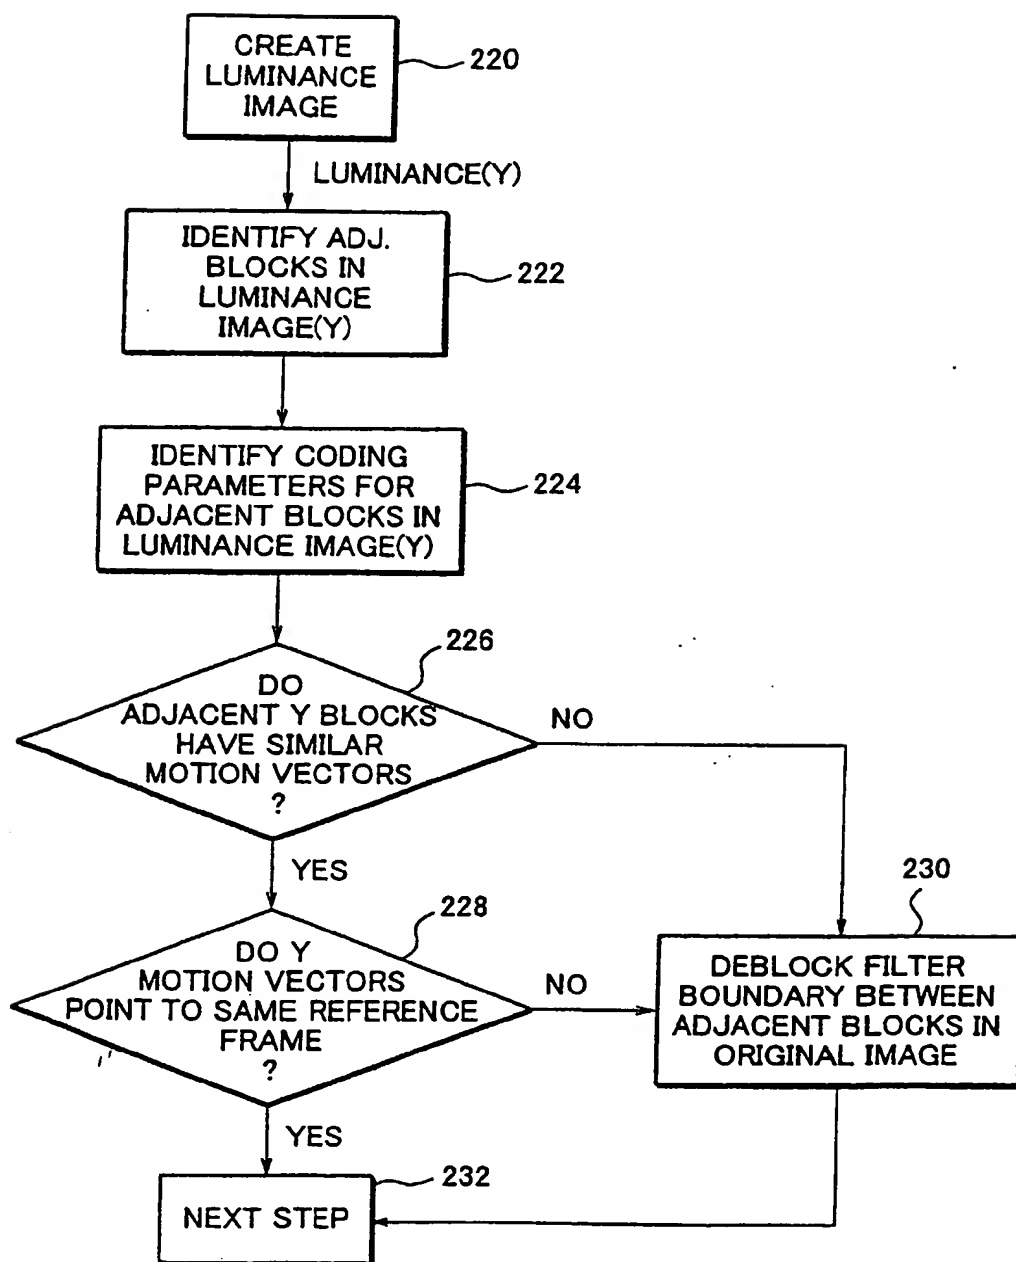


FIG.15

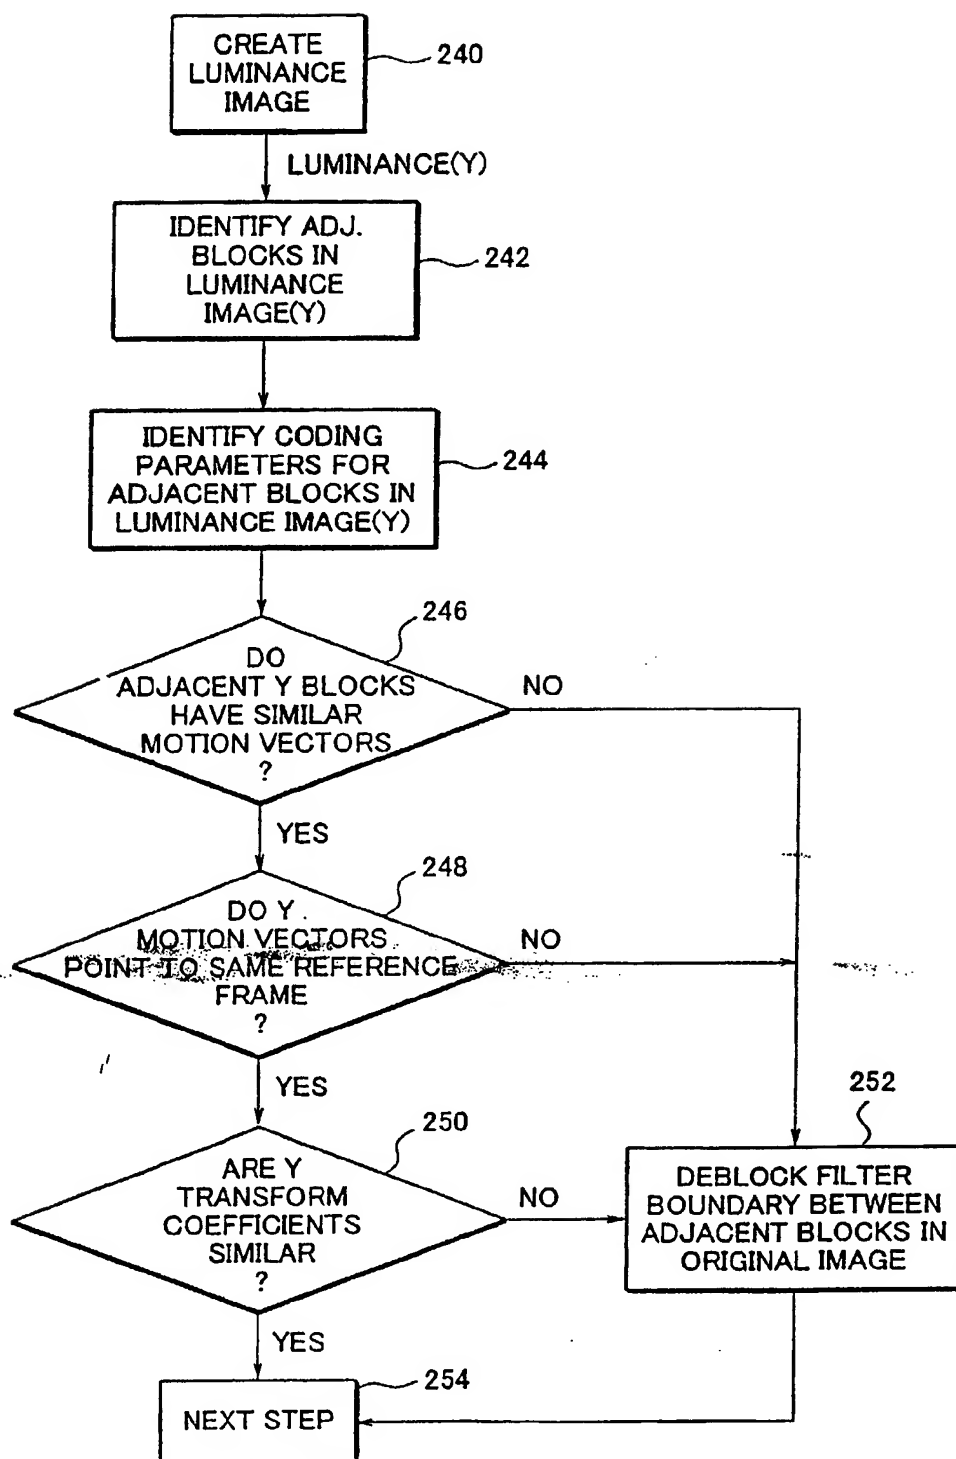


FIG.16


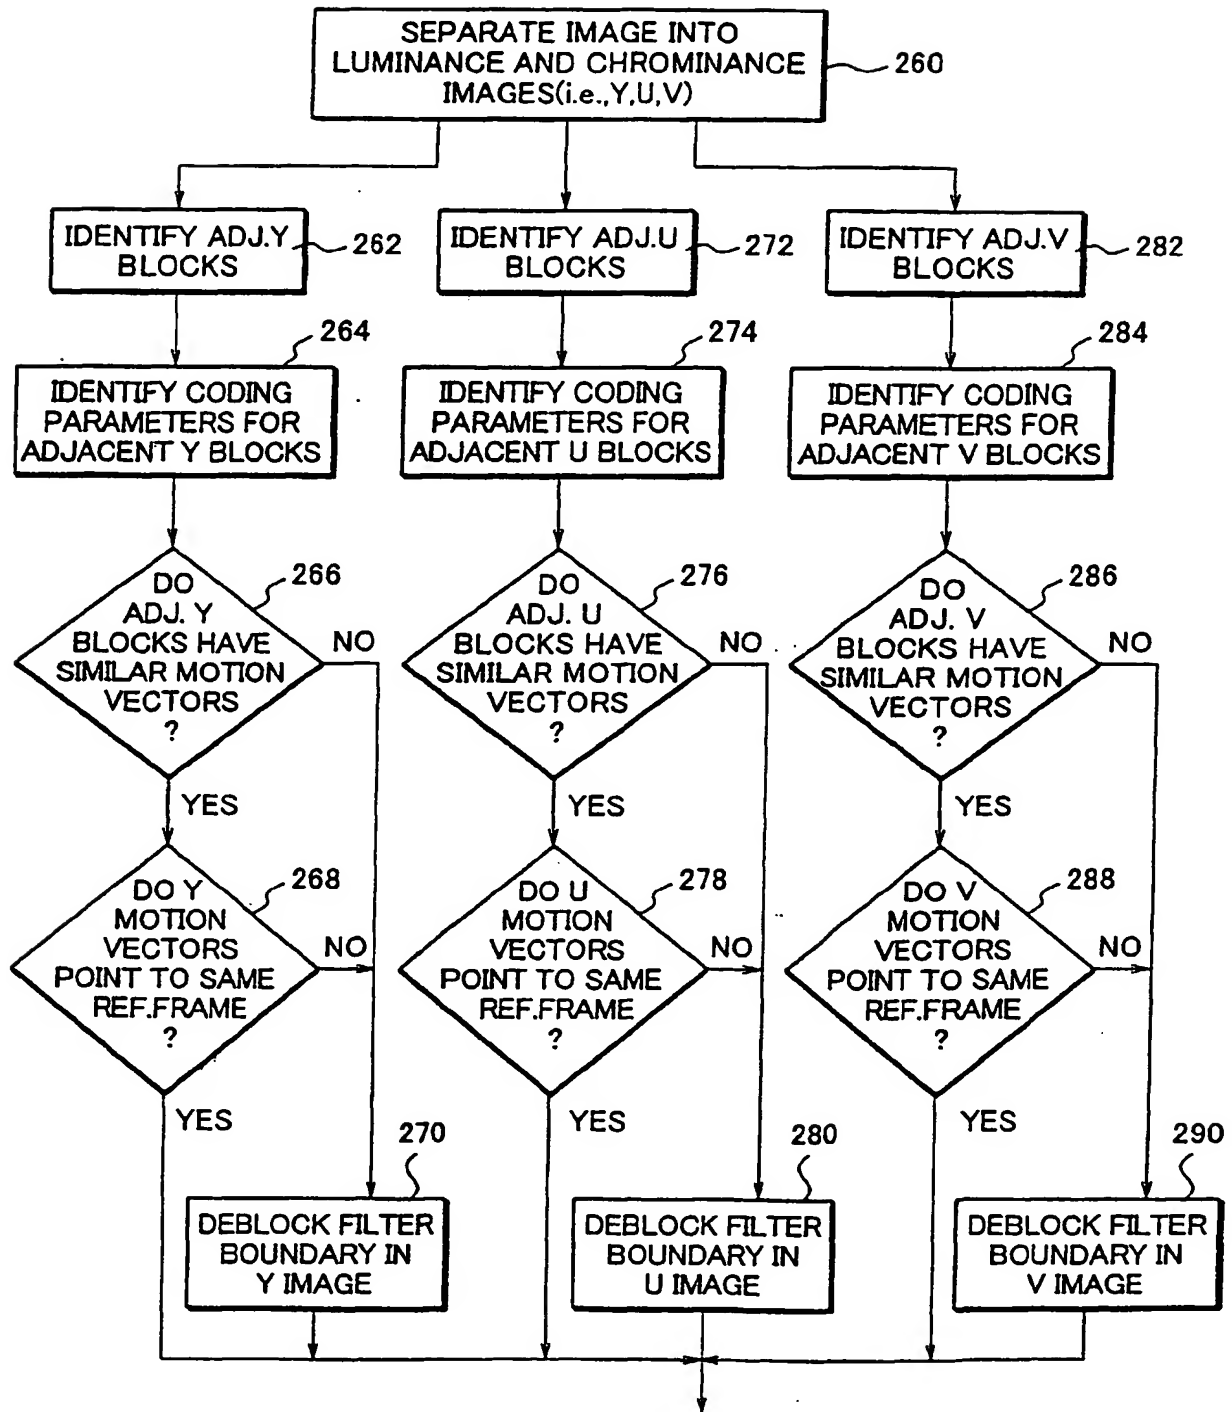


FIG. 17



BEST AVAILABLE COPY

(19)

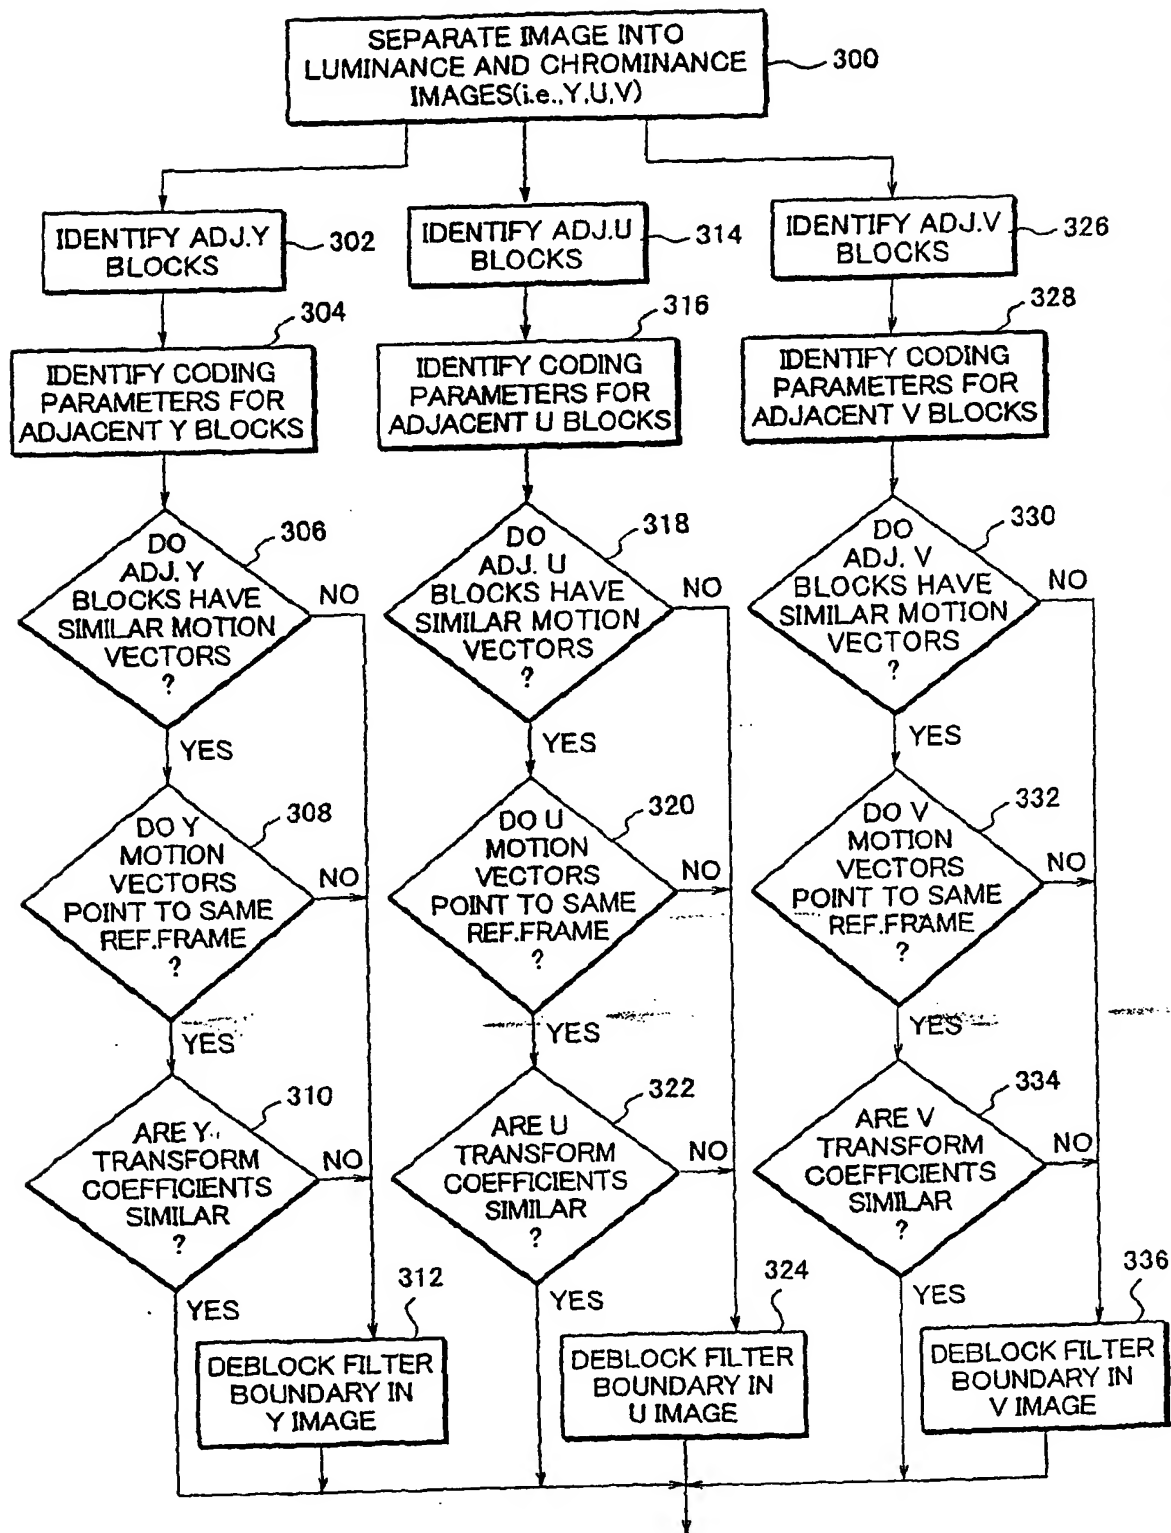

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 246 131 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
15.06.2005 Bulletin 2005/24

(51) Int Cl.7: G06T 9/00

(43) Date of publication A2:  
02.10.2002 Bulletin 2002/40

(21) Application number: 02006295.6

(22) Date of filing: 20.03.2002

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Sun, Shijun  
Vancouver, WA 98683 (US)  
• Lei, Shawmin  
Camas, WA 98607 (US)

(30) Priority: 26.03.2001 US 817701

(74) Representative: Müller - Hoffmann & Partner  
Patentanwälte,  
Innere Wiener Strasse 17  
81667 München (DE)


(71) Applicant: Sharp Kabushiki Kaisha  
Osaka (JP)

(54) **Method and apparatus for the reduction of artifact in decompressed images using post-filtering**

(57) Adjacent blocks (44, 46) are identified in an image. Coding parameters for the adjacent blocks (44, 46) are identified (102). Deblock filtering (104) between the identified adjacent blocks (44, 46) is skipped if the cod-

ing parameters (55) for the identified adjacent blocks (44, 46) are similar and not skipped if the coding parameters (55) for the identified adjacent blocks (44, 46) are substantially different.

FIG.8

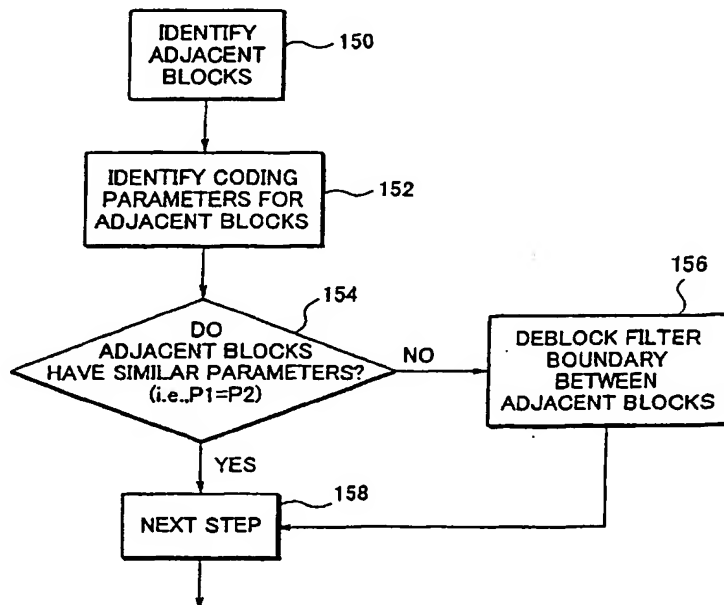

EP 1 246 131 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 02 00 6295

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 714 209 A (VICTOR COMPANY OF JAPAN, LTD) 29 May 1996 (1996-05-29) * page 5, line 33 - page 7, line 53 * * page 11, line 9 - page 12, line 6; figures 1-4,14-17 *	1-3,7-9, 17,19-21	G06T9/00 H04N7/26 H04N7/30 G06T9/00
A	LEE Y L ET AL: "Loop-filtering and post-filtering for low bit-rates moving picture coding" IMAGE PROCESSING, 1999. ICIP 99. PROCEEDINGS. 1999 INTERNATIONAL CONFERENCE ON KOBE, JAPAN 24-28 OCT. 1999, PISCATAWAY, NJ, USA, IEEE, US, vol. 1, 24 October 1999 (1999-10-24), pages 94-98, XP010369215 ISBN: 0-7803-5467-2 * pages 94-96, paragraph 2. - paragraph 3. *	1,8,16, 17,20, 22,23	
A	PARK H W ET AL: "A POSTPROCESSING METHOD FOR REDUCING QUANTIZATION EFFECTS IN LOW BIT-RATE MOVING PICTURE CODING" IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS FOR VIDEO TECHNOLOGY, IEEE INC. NEW YORK, US, vol. 9, no. 1, February 1999 (1999-02), pages 161-171, XP000802295 ISSN: 1051-8215 * pages 161-163, paragraph II - paragraph III.A *	1,8,20, 22,23	TECHNICAL FIELDS SEARCHED (Int.Cl.7)  H04N G06T
A	US 5 479 211 A (FUKUDA ET AL) 26 December 1995 (1995-12-26) * column 4, line 40 - column 8, line 58 * ----- -/--	1,8,20, 22,23	
The present search report has been drawn up for all claims			
1	Place of search Munich	Date of completion of the search 20 April 2005	Examiner Güttlich, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 02 00 6295

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 565 921 A (SASAKI ET AL) 15 October 1996 (1996-10-15) * column 24, lines 27-47 * * column 29, lines 19-27 * * column 34, lines 15-23 * -----	1,8,20, 22,23	
A	DERVIAUX C ET AL: "Blocking artifact reduction of DCT coded image sequences using a visually adaptive postprocessing" PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON IMAGE PROCESSING (ICIP) LAUSANNE, SEPT. 16 - 19, 1996, NEW YORK, IEEE, US, vol. VOL. 1, 16 September 1996 (1996-09-16), pages 5-8, XP010202580 ISBN: 0-7803-3259-8 * pages 6-7, paragraph 2.1.2 - paragraph 2.3 *	1,8,20, 22,23	
A,D	"H.26L TEST MODEL LONG TERM NUMBER 6 (TML-6) DRAFT 0" ITU-T TELECOMMUNICATION STANDARIZATION SECTOR OF ITU, GENEVA, CH, 9 January 2001 (2001-01-09), pages 1-35, XP001089815 * pages 19-22, paragraph 4.5 * -----	1,8,20, 22,23	
The present search report has been drawn up for all claims			
Place of search <b>Munich</b>		Date of completion of the search <b>20 April 2005</b>	Examiner <b>Güttlich, J</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

1  
EPO FORM 1503 03.02 (P04C01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 00 6295

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-04-2005

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0714209	A	29-05-1996	JP 2940422 B2	25-08-1999
			JP 8149470 A	07-06-1996
			JP 2900810 B2	02-06-1999
			JP 8172628 A	02-07-1996
			JP 2924691 B2	26-07-1999
			JP 8205178 A	09-08-1996
			CN 1132978 A ,C	09-10-1996
			DE 69525312 D1	21-03-2002
			DE 69525312 T2	14-11-2002
			EP 0714209 A2	29-05-1996
			KR 231186 B1	15-11-1999
			US 6167157 A	26-12-2000
			US 5949908 A	07-09-1999
US 5479211	A	26-12-1995	JP 3365784 B2	14-01-2003
			JP 5308623 A	19-11-1993
			JP 3233999 B2	04-12-2001
			JP 6086328 A	25-03-1994
US 5565921	A	15-10-1996	JP 6268997 A	22-09-1994
			JP 6311499 A	04-11-1994
			JP 7203443 A	04-08-1995
			JP 7203458 A	04-08-1995

EPC FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

BEST AVAILABLE COPY

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**